



## 200VA 480 VOLTS TO 120 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$1,801.80 CAD**



Single Phase Control Transformer with a capacity of 200VA, transforming 480 Volts to 120 Volts

SKU: CE200H-A

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| VA Rating | A     | B     | C    | Mounting Dimensions<br>Ø x L |
|-----------|-------|-------|------|------------------------------|
| 25        | 3     | 6     | 3.5  | 1.375 4.375                  |
| 50        | 3     | 6     | 3.5  | 1.375 4.375                  |
| 100       | 3     | 6     | 3.5  | 1.375 4.375                  |
| 150       | 3.5   | 6.658 | 3.13 | 3.25 5                       |
| 200       | 3.5   | 6.658 | 3.13 | 3.25 5                       |
| 250       | 3.5   | 6.658 | 3.13 | 3.25 5                       |
| 350       | 4.125 | 6.5   | 3.75 | 3.75 7.875                   |
| 500       | 4.875 | 7     | 4.38 | 4.5 5.5                      |
| 750       | 4.875 | 7     | 4.38 | 4.5 5.5                      |
| 1000      | 4.875 | 7     | 4.38 | 4.5 5.5                      |
| 1500      | 5.625 | 9     | 5.63 | 5 7.25                       |
| 2000      | 6.875 | 9.25  | 6.25 | 6 8                          |
| 3000      | 6.875 | 9.25  | 6.25 | 6 8                          |
| 5000      | 8     | 10.5  | 9.5  | 6 9                          |

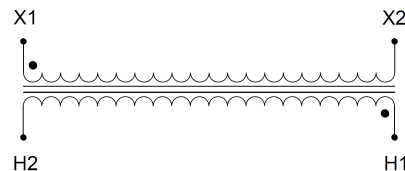

Single Phase Control Transformer with a capacity of 200VA, transforming 480 Volts to 120 Volts



**OFFICIAL QUOTE**  
**200VA 480 VOLTS TO 120 VOLTS**  
**SINGLE PHASE CONTROL**  
**TRANSFORMER**





## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 12 lbs                                                                                               |
| Phases                     | <a href="#">1</a>                                                                                    |
| Connection                 | <a href="#">1Ph-CT-SS-SU</a>                                                                         |
| Primary Voltage            | <a href="#">480</a>                                                                                  |
| Primary Max Current        | <a href="#">0.42A</a>                                                                                |
| Primary Markings           | <a href="#">H1-H2</a>                                                                                |
| Primary Terminals          | <a href="#">Leads</a>                                                                                |
| Secondary Voltage          | <a href="#">120</a>                                                                                  |
| Secondary Max Current      | <a href="#">1.67A</a>                                                                                |
| Secondary Markings         | <a href="#">X1-X2</a>                                                                                |
| Secondary Terminals        | <a href="#">Leads</a>                                                                                |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">80°C</a>                                                                                 |
| Insuation Class            | <a href="#">130°C (Class B)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">5.0 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">Type-1 Indoor</a>                                                                        |
| Enclosure Size             | <a href="#">See Enclosure Chart</a>                                                                  |
| Finish/Colour              | <a href="#">Semigloss – Black</a>                                                                    |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE  
200VA 480 VOLTS TO 120 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



|                      |                            |
|----------------------|----------------------------|
| VA                   | <a href="#">200</a>        |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |