

25VA 347 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$94.64 CAD



Single Phase Control Transformer with a capacity of 25VA, transforming 347 Volts to 120/240 Volts

SKU: CS25E-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| Control Transformers - Table of Dimensions (inches) | | | | | | | | | |
|---|--------------------|------|------|------|------|----------|--------------|--------------|--------------|
| VA Rating | Overall Dimensions | | | | | Mounting | | Mounting | |
| | A | B | C | D | E | Flange | Flange | Flange | Flange |
| 25 | 3 | 3 | 2.5 | 2.5 | 2.5 | 1.11 | 0.25 x 0.625 | 0.25 x 0.625 | 0.25 x 0.625 |
| 50 | 3 | 3 | 2.5 | 2.5 | 2.5 | 1.11 | 0.25 x 0.625 | 0.25 x 0.625 | 0.25 x 0.625 |
| 100 | 3 | 4 | 2.5 | 2.5 | 3 | 1.11 | 0.25 x 0.625 | 0.25 x 0.625 | 0.25 x 0.625 |
| 150 | 3.75 | 4.25 | 3.11 | 3.25 | 3.5 | 4.5 | 0.25 x 0.625 | 0.25 x 0.625 | 0.25 x 0.625 |
| 200 | 3.75 | 4.5 | 3.11 | 3.25 | 3.5 | 4.5 | 0.25 x 0.625 | 0.25 x 0.625 | 0.25 x 0.625 |
| 250 | 3.75 | 5 | 3.11 | 3.25 | 3.5 | 4.5 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 350 | 4.5 | 5 | 3.75 | 3.75 | 3.75 | 4.75 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 500 | 5.25 | 5 | 4.38 | 4.5 | 3.75 | 4.75 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 750 | 5.25 | 5.5 | 4.38 | 4.5 | 3.75 | 4.75 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 1000 | 5.25 | 6.5 | 4.38 | 4.5 | 4.75 | 5.75 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 1500 | 6.75 | 7.25 | 5.63 | 5 | 3.75 | 5.25 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 2000 | 7.5 | 7.5 | 6.25 | 6 | 4.25 | 5.25 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 3000 | 7.5 | 8.75 | 6.25 | 6 | 5.5 | 6.5 | 0.31 x 0.625 | 0.31 x 0.625 | 0.31 x 0.625 |
| 5000 | 9 | 10 | 8 | 7 | 7 | 8 | 0.44 x 0.625 | 0.44 x 0.625 | 0.44 x 0.625 |

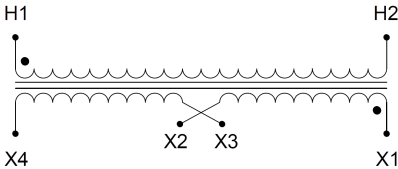

Single Phase Control Transformer with a capacity of 25VA, transforming 347 Volts to 120/240 Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 2.3 lbs |
| Phases | 1 |
| Connection | 1Ph-CT-SD-SD |
| Primary Voltage | 347 |
| Primary Max Current | 0.07A |
| Primary Markings | H1-H2 |
| Primary Terminals | Terminals |
| Secondary Voltage | 120/240 |
| Secondary Max Current | 0.21A |
| Secondary Markings | X1-X2-X3-X4 |
| Secondary Terminals | Terminals |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Temperatue Rise | 80°C |
| Insuation Class | 130°C (Class B) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 5.0 – 7.0% |
| Sound (db) | 40 |
| Enclosure Type | Core & Coil |
| Enclosure Size | See Core & Coil Chart |
| Finish/Colour | N/A |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered |



OFFICIAL QUOTE

25VA 347 VOLTS TO 120/240 VOLTS

SINGLE PHASE CONTROL

TRANSFORMER



| | |
|----------------------|----------------------------|
| VA | |
| Country/Manufacturer | Canada/RPM |