




**25VA 600 VOLTS TO 240/480 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**

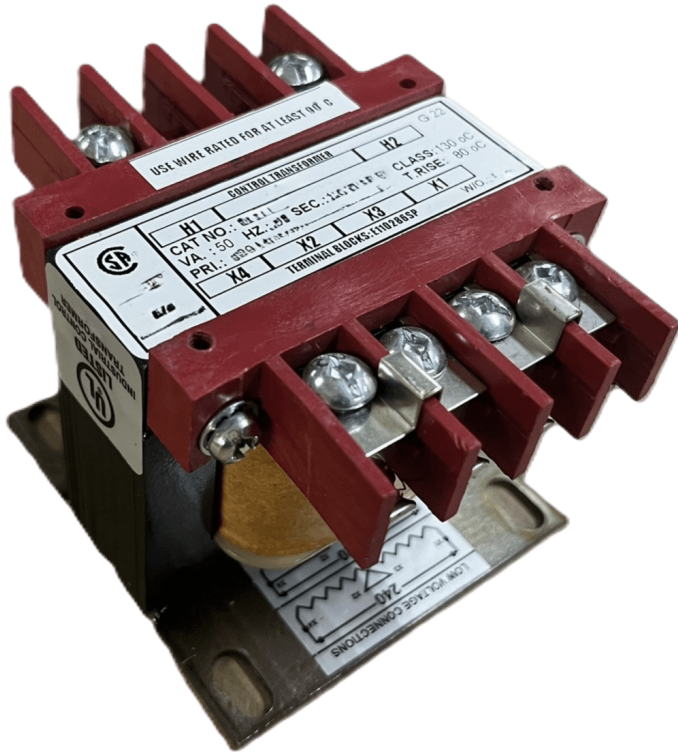

25VA 600 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$94.64 CAD



Single Phase Control Transformer with a capacity of 25VA, transforming 600 Volts to 240/480 Volts

SKU: CS25J-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions				Mounting Slot Ø x L	Mounting Slot
	A	B	C	D		
25	3	4	2.5	2.5	3.15	0.25 x 0.625
50	3	4	2.5	2.5	2.5	0.13 x 0.25
100	3	4	2.5	2.5	3	0.375 x 0.25
150	3.75	4.25	3.13	3.25	3.5	0.5 x 0.25
200	3.75	4.5	3.13	3.25	3.5	0.5 x 0.25
250	3.75	5	3.13	3.25	3.5	0.5 x 0.31 x 0.25
350	4.5	5	3.75	3.75	3.75	0.75 x 0.31 x 0.625
500	5.25	5.5	4.38	4.5	3.75	0.75 x 0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	0.75 x 0.31 x 0.625
1000	5.25	5.5	4.38	4.5	3.75	0.75 x 0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	0.5 x 0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	0.5 x 0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	0.5 x 0.31 x 0.625
4000	9	10	8	7	7	0.44 x 0.825

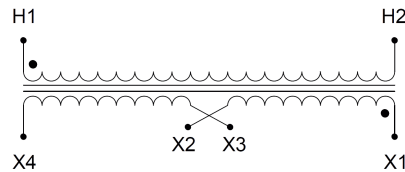

Single Phase Control Transformer with a capacity of 25VA, transforming 600 Volts to 240/480 Volts



PRODUCT SPECIFICATIONS

Weight	2.3 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	600
Primary Max Current	0.04A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	0.1A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE
25VA 600 VOLTS TO 240/480 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM