


750VA 480 VOLTS TO 240/480 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER

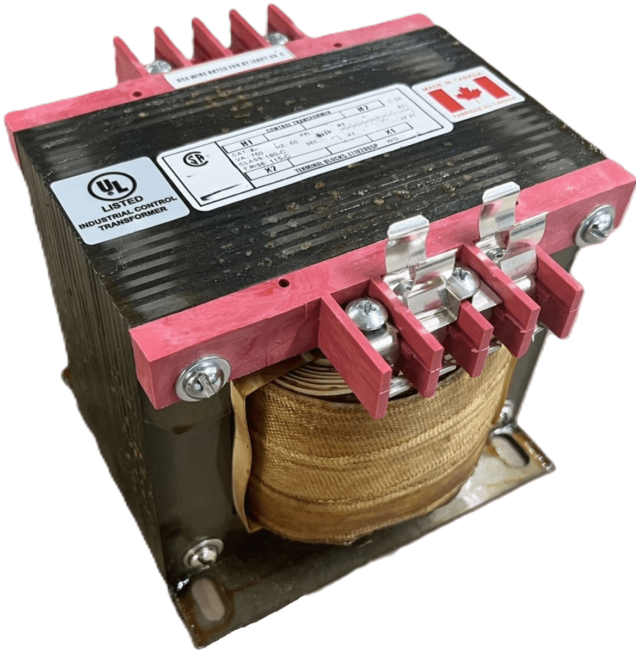

750VA 480 VOLTS TO  
240/480 VOLTS SINGLE  
PHASE CONTROL  
TRANSFORMER

**\$420.42 CAD**



Single Phase Control Transformer with a capacity of 750VA, transforming 480 Volts to 240/480 Volts

SKU: CS750H-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers: Table of Dimensions (inches)						
Overall Dimensions						
VA	A	B	C	Mounting Centre to Side	F	Mounting Slot
25	3	3	2.5	2.5	2.5	3.33 0.25 x 0.625
50	3	3	2.5	2.5	2.5	3.33 0.25 x 0.625
100	3	4	2.5	2.5	3	3.75 0.25 x 0.625
150	3.75	4.25	3.33	3.25	3.5	4.5 0.25 x 0.625
200	3.75	4.5	3.33	3.25	3.5	4.5 0.25 x 0.625
250	3.75	5	3.33	3.25	3.5	4.5 0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	4.75 0.31 x 0.625
500	5.25	5	4.38	4.5	3.75	4.75 0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	4.75 0.31 x 0.625
1000	5.25	6.5	4.38	4.5	4.75	5.75 0.31 x 0.625
1500	6.75	7.25	5.63	5	5.25	6.31 x 0.625
2000	7.5	7.5	6.25	6	5.25	6.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	6.31 x 0.625
5000	9	10	8	7	8	8.44 x 0.625

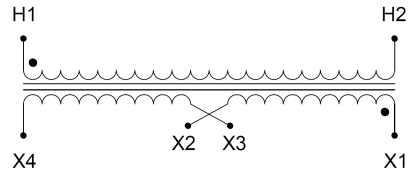

Single Phase Control Transformer with a capacity of 750VA, transforming 480 Volts to 240/480 Volts

750VA 480 VOLTS TO 240/480 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



PRODUCT SPECIFICATIONS

<b>Weight</b>	50 lbs
<b>Phases</b>	<a href="#">1</a>
<b>Connection</b>	<a href="#">1Ph-CT-SD-SD</a>
<b>Primary Voltage</b>	<a href="#">480</a>
<b>Primary Max Current</b>	<a href="#">1.56A</a>
<b>Primary Markings</b>	<a href="#">H1-H2</a>
<b>Primary Terminals</b>	<a href="#">Terminals</a>
<b>Secondary Voltage</b>	<a href="#">240/480</a>
<b>Secondary Max Current</b>	<a href="#">3.13A</a>
<b>Secondary Markings</b>	<a href="#">X1-X2-X3-X4</a>
<b>Secondary Terminals</b>	<a href="#">Terminals</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Temperatue Rise</b>	<a href="#">115°C</a>
<b>Insuation Class</b>	<a href="#">180°C (Class F)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">5.0 – 7.0%</a>
<b>Sound (db)</b>	<a href="#">40</a>
<b>Enclosure Type</b>	<a href="#">Core &amp; Coil</a>
<b>Enclosure Size</b>	<a href="#">See Core &amp; Coil Chart</a>
<b>Finish/Colour</b>	<a href="#">N/A</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

750VA 480 VOLTS TO 240/480 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



VA	
Country/Manufacturer	<a href="#">Canada/RPM</a>