



**112.5KVA 600 VOLTS TO 240Y/139  
VOLTS THREE PHASE ENCAPSULATED  
ISOLATION TRANSFORMER**



**112.5KVA 600 VOLTS TO  
240Y/139 VOLTS THREE  
PHASE ENCAPSULATED  
ISOLATION TRANSFORMER**



**\$14,360.00 CAD**

Three Phase Encapsulated Isolation Transformer  
with a capacity of 112.5kVA, transforming 600  
Volts to 240Y/139 Volts

**SKU:** BA112J-S/EP

**Categories:** [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

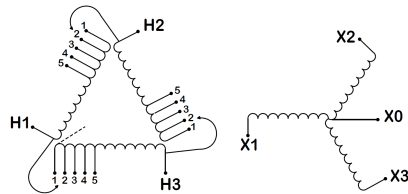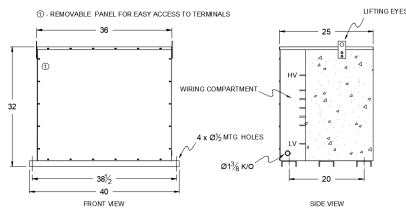

Three Phase Encapsulated Isolation Transformer with a capacity of 112.5kVA, transforming 600 Volts to 240Y/139 Volts



112.5KVA 600 VOLTS TO 240Y/139  
VOLTS THREE PHASE ENCAPSULATED  
ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	1365 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">112.5</a>
Connection	<a href="#">3Ph-DY-5T-SD</a>
Primary Voltage	<a href="#">600</a>
Primary Max Current	<a href="#">108.3A</a>
Primary Markings	<a href="#">H1-H2-3</a>
Primary Terminals	<a href="#">#2/0-6 AWG</a>
Secondary Voltage	<a href="#">240Y/139</a>
Secondary Max Current	<a href="#">270.6A</a>
Secondary Markings	<a href="#">X0-X1-X2-X3</a>
Secondary Terminals	<a href="#">600MCM-2</a>
Primary Taps	<a href="#">+/- 2 x 2.5%</a>
Conductor Material	<a href="#">Aluminum</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.5 – 3.5%</a>
Sound (db)	<a href="#">50</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-3PEP-8</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>