


#### **OFFICIAL QUOTE**

## 30KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



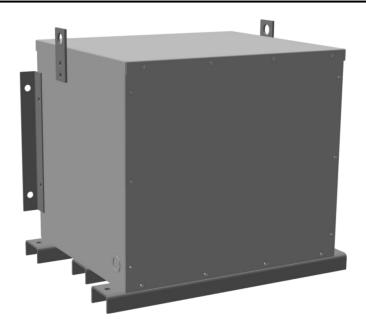

# 30KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$8,645.00 CAD

Three Phase Encapsulated Isolation Transformer with a capacity of 30kVA, transforming 460 Volts to 208Y/120 Volts

SKU: BC30H1-M/EP

Categories: Encapsulated Isolation Transformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Encapsulated Isolation Transformer with a capacity of 30kVA, transforming 460 Volts to 208Y/120 Volts



### **OFFICIAL QUOTE**



# 30KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

## **PRODUCT SPECIFICATIONS**

PRODUCT SPECIFICATIONS	
Weight	520 lbs
Phases	3
kVA	30
Connection	3Ph-DY-5T-SD
Primary Voltage	460
Primary Max Current	108.3A
Primary Markings	H1-H2-3
Primary Terminals	#2-14 AWG
Secondary Voltage	208Y/120
Secondary Max Current	83.3A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 - 3.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM