



25VA 575 VOLTS TO 277 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$3,651.48 CAD

Single Phase Isolation Transformer with a capacity of 25kVA, transforming 575 Volts to 277 Volts

SKU: SC25J1-D/Z3

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

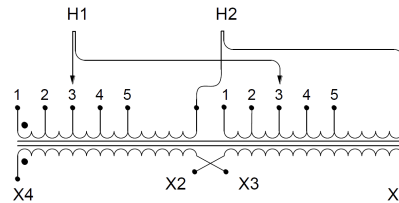

Single Phase Isolation Transformer with a capacity of 25kVA, transforming 575 Volts to 277 Volts



PRODUCT SPECIFICATIONS

Weight	225 lbs
Phases	1
kVA	25
Connection	1Ph-2coil-5t-SD
Primary Voltage	575
Primary Max Current	43.48A
Primary Markings	H1-H2
Primary Terminals	#2-14 AWG
Secondary Voltage	277
Secondary Max Current	90.25A
Secondary Markings	X1-X2
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	98.00% (DOE 2016/NRCan 2019)
Impedance Range	4.0 – 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

25VA 575 VOLTS TO 277 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey