


#### **OFFICIAL QUOTE**

### 37.5VA 110 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



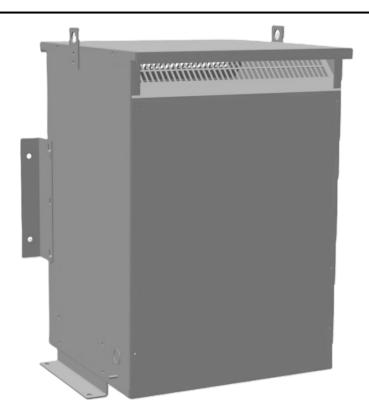

### 37.5VA 110 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$3,628.80 CAD

Single Phase Isolation Transformer with a capacity of 37.5kVA, transforming 110 Volts to 115/230 Volts

SKU: SA37A2-K1/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Isolation Transformer with a capacity of 37.5kVA, transforming 110 Volts to 115/230 Volts



#### **OFFICIAL QUOTE**



# 37.5VA 110 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### **PRODUCT SPECIFICATIONS**

PRODUCT SPECIFICATIONS	
Weight	272 lbs
Phases	1
kVA	37.5
Connection	1Ph-2coil-5T-SU
Primary Voltage	110
Primary Max Current	340.91A
Primary Markings	<u>X1-X2</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	115/230
Secondary Max Current	326.09A
Secondary Markings	H1-H2
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.20% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



#### **OFFICIAL QUOTE**



# 37.5VA 110 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey