


OFFICIAL QUOTE

3KVA 110 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER



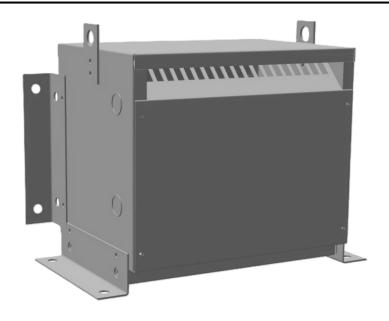

3KVA 110 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,489.25 CAD

Three Phase Isolation Transformer with a capacity of 3kVA, transforming 110 Volts to 240Y/139 Volts

SKU: BC3A2-S

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 110 Volts to 240Y/139 Volts



OFFICIAL QUOTE



3KVA 110 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	73 lbs
Phases	<u>3</u>
kVA	3
Connection	3Ph-DY-3T-SU
Primary Voltage	110
Primary Max Current	15.75A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	240Y/139
Secondary Max Current	7.22A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	<u>+/- 1 x 5%</u>
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>115°C</u>



OFFICIAL QUOTE



3KVA 110 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey