


3KVA 208 VOLTS TO 575Y/332 VOLTS  
THREE PHASE ISOLATION  
TRANSFORMER

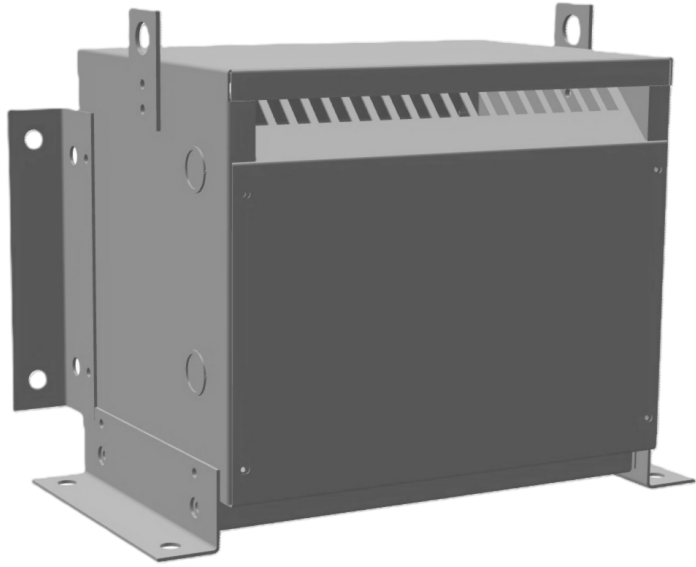

**3KVA 208 VOLTS TO  
575Y/332 VOLTS THREE  
PHASE ISOLATION  
TRANSFORMER**



**\$1,618.75 CAD**

Three Phase Isolation Transformer with a capacity of 3kVA, transforming 208 Volts to 575Y/332 Volts

**SKU:** BC3B-Q1

**Categories:** [Isolation Transformers](#)

**SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**

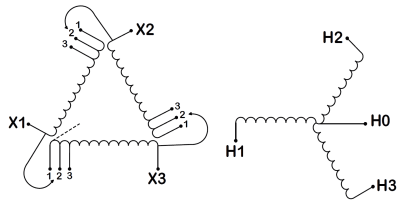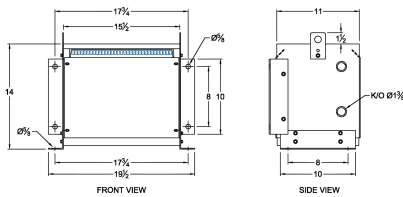

Three Phase Isolation Transformer with a capacity of 3kVA, transforming 208 Volts to 575Y/332 Volts

3KVA 208 VOLTS TO 575Y/332 VOLTS  
THREE PHASE ISOLATION  
TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	73 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">3</a>
Connection	<a href="#">3Ph-DY-3T-SU</a>
Primary Voltage	<a href="#">208</a>
Primary Max Current	<a href="#">8.33A</a>
Primary Markings	<a href="#">X1-X2-X3</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">575Y/332</a>
Secondary Max Current	<a href="#">3.01A</a>
Secondary Markings	<a href="#">H0-H1-H2-H3</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 1</a>
Enclosure Size	<a href="#">E1-3</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Temperatue Rise	<a href="#">115°C</a>



OFFICIAL QUOTE

3KVA 208 VOLTS TO 575Y/332 VOLTS  
THREE PHASE ISOLATION  
TRANSFORMER



Insuation Class	<a href="#">115°C</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>