


OFFICIAL QUOTE

3KVA 277 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



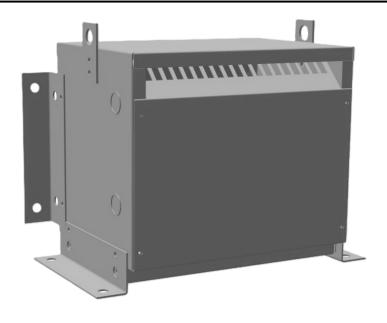

3KVA 277 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,579.90 CAD


Three Phase Isolation Transformer with a capacity of 3kVA, transforming 277 Volts to 415Y/240 Volts

SKU: BC3D-N2

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 277 Volts to 415Y/240 Volts



OFFICIAL QUOTE



3KVA 277 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	73 lbs
Phases	<u>3</u>
kVA	<u>3</u>
Connection	3Ph-DY-3T-SU
Primary Voltage	277
Primary Max Current	6.25A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	<u>415Y/240</u>
Secondary Max Current	4.17A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	<u>+/- 1 x 5%</u>
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 - 7.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>115°C</u>



OFFICIAL QUOTE



3KVA 277 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey