


#### **OFFICIAL QUOTE**

### 7.5VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



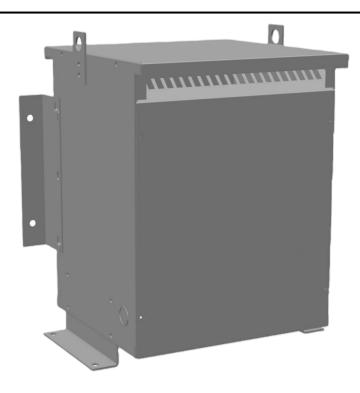

### 7.5VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$1,754.98 CAD


Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 277 Volts to 120/240 Volts

SKU: SC7D-K

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 277 Volts to 120/240 Volts



### **OFFICIAL QUOTE**



# 7.5VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	128 lbs
Phases	1
kVA	7.5
Connection	1Ph-1coil-3T-SD
Primary Voltage	120/240
Primary Max Current	27.08A
Primary Markings	H1-H2
Primary Terminals	#2-14 AWG
Secondary Voltage	120/240
Secondary Max Current	62.5A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



### **OFFICIAL QUOTE**



# 7.5VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey