

**750VA 347 VOLTS TO  
240Y/139 VOLTS THREE  
PHASE ISOLATION  
TRANSFORMER**



**\$73,609.20 CAD**

Three Phase Isolation Transformer with a capacity of 750kVA, transforming 347 Volts to 240Y/139 Volts

**SKU:** BC750E-S/Z3

**Categories:** [Isolation Transformers](#)

**SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**

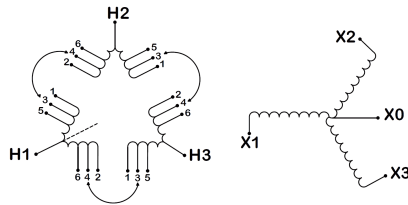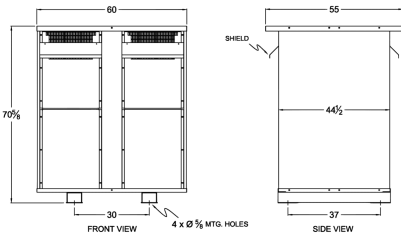

Three Phase Isolation Transformer with a capacity of 750kVA, transforming 347 Volts to 240Y/139 Volts



PRODUCT SPECIFICATIONS

<b>Weight</b>	4795 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">750</a>
<b>Connection</b>	<a href="#">3Ph-DY-5CT-SD</a>
<b>Primary Voltage</b>	<a href="#">347</a>
<b>Primary Max Current</b>	<a href="#">1247.88A</a>
<b>Primary Markings</b>	<a href="#">H1-H2-H3</a>
<b>Primary Terminals</b>	<a href="#">Pads</a>
<b>Secondary Voltage</b>	<a href="#">240Y/139</a>
<b>Secondary Max Current</b>	<a href="#">1804.22A</a>
<b>Secondary Markings</b>	<a href="#">X0-X1-X2-X3</a>
<b>Secondary Terminals</b>	<a href="#">Pads</a>
<b>Primary Taps</b>	<a href="#">+/- 2 x 2.5%</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">99.23% (DOE 2016/NRCan 2019)</a>
<b>Impedance Range</b>	<a href="#">5.0 – 7.0%</a>
<b>Sound (db)</b>	<a href="#">64</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-11</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
<b>Temperatue Rise</b>	<a href="#">150°C</a>



OFFICIAL QUOTE

750VA 347 VOLTS TO 240Y/139  
VOLTS THREE PHASE ISOLATION  
TRANSFORMER



Insuation Class	<a href="#">150°C</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>