


OFFICIAL QUOTE

75KVA 230 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



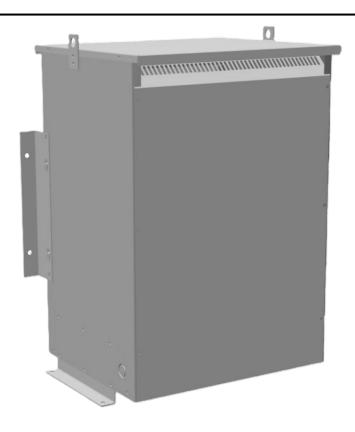

75KVA 230 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$5,488.49 CAD


Single Phase Isolation Transformer with a capacity of 75kVA, transforming 230 Volts to 220/440 Volts

SKU: SA75C1-L2/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 75kVA, transforming 230 Volts to 220/440 Volts



OFFICIAL QUOTE



75KVA 230 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	405 lbs	
Phases	1	
kVA	<u>75</u>	
Connection	1Ph-2coil-5t-SD	
Primary Voltage	230	
Primary Max Current	326.09A	
Primary Markings	H1-H2	
Primary Terminals	Pads	
Secondary Voltage	220/440	
Secondary Max Current	340.91A	
Secondary Markings	<u>X1-X2</u>	
Secondary Terminals	Pads	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Aluminum	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	<u>50</u>	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-7	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



OFFICIAL QUOTE



75KVA 230 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey