


OFFICIAL QUOTE

9VA 400 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER



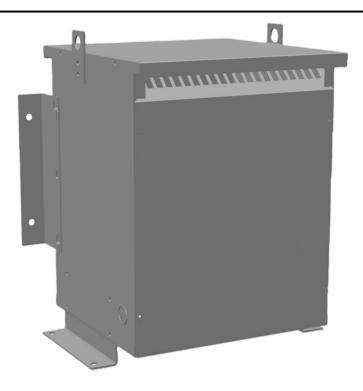

9VA 400 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$2,513.03 CAD

Three Phase Isolation Transformer with a capacity of 9kVA, transforming 400 Volts to 380Y/220 Volts

SKU: BC9G1-R

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 9kVA, transforming 400 Volts to 380Y/220 Volts



OFFICIAL QUOTE



9VA 400 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 132 lbs |
| Phases | <u>3</u> |
| kVA | 9 |
| Connection | 3Ph-DY-3T-SD |
| Primary Voltage | 400 |
| Primary Max Current | 12.99A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 380Y/220 |
| Secondary Max Current | 13.67A |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | +/- 1 x 5% |
| Conductor Material | Copper |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>5.0 – 7.0%</u> |
| Sound (db) | 40 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-4 |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 150°C |



OFFICIAL QUOTE



9VA 400 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

| Insuation Class | 150°C |
|----------------------|--|
| Country/Manufacturer | Canada/RPM |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |