




7.5KVA 480 VOLTS TO 120/240 VOLTS  
SINGLE PHASE PUSH-ON BREAKER  
MINI POWER CENTER

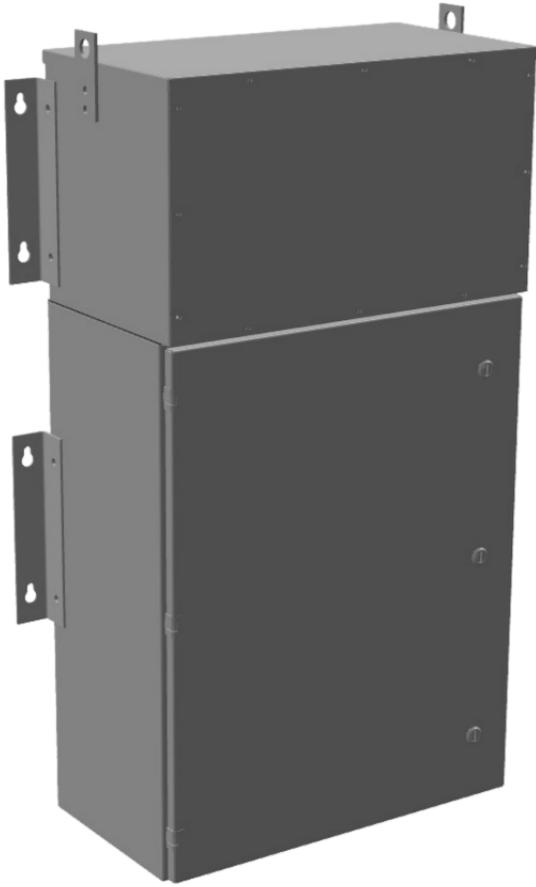



7.5KVA 480 VOLTS TO  
120/240 VOLTS SINGLE  
PHASE PUSH-ON BREAKER  
MINI POWER CENTER

**\$6,134.00 CAD**

SKU: MP1C7H-K

Categories: [Mini Power Centers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

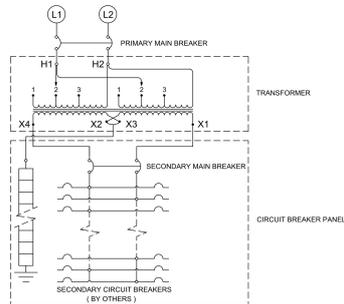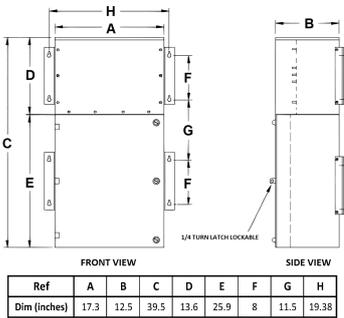

PRODUCT SPECIFICATIONS



7.5KVA 480 VOLTS TO 120/240 VOLTS  
SINGLE PHASE PUSH-ON BREAKER  
MINI POWER CENTER

<b>Weight</b>	275 lbs
<b>Phases</b>	1
<b>kVA</b>	7.5
<b>Connection</b>	MPC1P-3t
<b>Primary Taps</b>	+/- 1 x 5%
<b>Conductor Material</b>	Copper
<b>BIL (Insulation) Level</b>	10kV
<b>Impedance Range</b>	1.5 – 3.0%
<b>Enclosure Type</b>	NEMA 3R Outdoor
<b>Enclosure Size</b>	E3R-1PMPC-1
<b>Finish/Colour</b>	Polyester Powder Coat – ANSI/ASA 61 Grey
<b>Standards &amp; Certifications</b>	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered
<b>Incoming Voltage</b>	480
<b>Primary Breaker</b>	30A
<b>Interrupting Rating</b>	14kAIC @ 480V
<b>Output Voltage</b>	120/240
<b>Secondary Breaker</b>	40A
<b>Short Circuit Withstand</b>	10kAIC @ 240V
<b>Panel Board</b>	Push-On
<b>Load Center Bus Material</b>	Aluminum
<b># of Circuits</b>	12
<b>Circuit Breaker Suitability</b>	Eaton Type BR
<b>Temperatue Rise</b>	130°C
<b>Insuation Class</b>	200°C (Class N)
<b>Country/Manufacturer</b>	Canada/RPM