


OFFICIAL QUOTE

RC75J-C



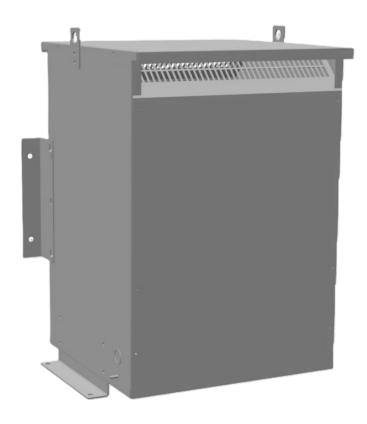


RC75J-C

\$4,021.13 USD

SKU: d8d6155a6b88

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

Weight	400 lbs
Phases	3
kVA	<u>75</u>



OFFICIAL QUOTE

RC75J-C



Connection	<u>3PhA-NT-1</u>
Primary Voltage	600
Primary Max Current	72.2A
Primary Markings	H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	240
Secondary Max Current	<u>180.4A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>300MCM-6</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insuation Class	220°C
BIL (Insulation) Level	<u>10kV</u>
Efficiency	N/A
Impedance	<u>1.5 - 3.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure	<u>E3R-6</u>
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered