



OFFICIAL QUOTE

5000VA 120/240 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER



5000VA 120/240 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$1,901.90 CAD



Single Phase Control Transformer with a capacity of 5000VA, transforming 120/240 Volts to 240/480 Volts

SKU: CS5000K-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

kVA	Overall Dimensions (Inches)					Mounting Slot
	A	B	C	Mounting Centre D/E	F	
25	3	3	2.5	2.5	3.33	0.25 x 0.625
30	3	3	2.5	2.5	3.33	0.25 x 0.625
100	3	4	2.5	2.5	3.75	0.25 x 0.625
150	3.75	4.25	3.33	3.25	3.5	0.25 x 0.625
200	3.75	4.5	3.33	3.25	3.5	0.25 x 0.625
250	3.75	5	3.33	3.25	3.5	0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	0.31 x 0.625
500	5.25	5	4.38	4.5	3.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	0.31 x 0.625
1000	5.25	6.5	4.38	4.5	3.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	0.31 x 0.625
5000	9	10	8	7	7	0.44 x 0.625

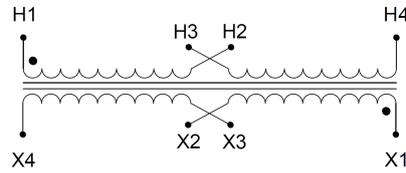

Single Phase Control Transformer with a capacity of 5000VA, transforming 120/240 Volts to 240/480 Volts



OFFICIAL QUOTE



5000VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	110 lbs
Phases	1
Connection	1Ph-CT-DD-SU
Primary Voltage	120/240
Primary Max Current	41.67A
Primary Markings	X1-X2-X3-X4
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	20.83A
Secondary Markings	H1-H2-H3-H4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE



5000VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER

VA	5000
Country/Manufacturer	Canada/RPM