


OFFICIAL QUOTE

RA75H-B/EP



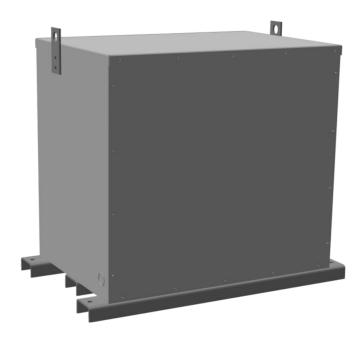


RA75H-B/EP


\$6,385.19 USD

SKU: 8e3a39a74bec

Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 830 lbs |
|-----------------|------------------|
| Phases | 3 |
| kVA | <u>75</u> |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 480 |



OFFICIAL QUOTE

RA75H-B/EP



| Primary Max Current | 90.2A |
|----------------------------|--|
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | #2/0-6 AWG |
| Secondary Voltage | 208 |
| Secondary Max Current | <u>208.2A</u> |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>300MCM-6</u> |
| Primary Taps | N/A |
| Conductor Material | <u>Aluminum</u> |
| Insuation Class | 200°C |
| BIL (Insulation) Level | <u>10kV</u> |
| Impedance | <u>0.5 – 1.5%</u> |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | E3R-3PEP-6 |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |