


#### **OFFICIAL QUOTE**

## 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



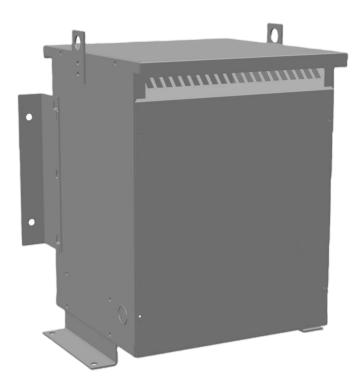

### 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$2,290.45 USD


Single Phase Autotransformer with a capacity of 37.5kVA, transforming 415 Volts to 208 Volts

SKU: MC37G2-B

**Categories:** <u>Autotransformer</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 37.5kVA, transforming 415 Volts to 208 Volts



#### **OFFICIAL QUOTE**



### SINGLE PHASE AUTOTRANSFORMER

#### **PRODUCT SPECIFICATIONS**

Weight	185.5 lbs
Phases	1
kVA	37.5
Connection	1PhA-NT-1
Primary Voltage	415
Primary Max Current	<u>52.2A</u>
Primary Markings	<u>H0-H1</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	208
Secondary Max Current	104.1A
Secondary Markings	<u>X0-X1</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	45 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-4</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



#### **OFFICIAL QUOTE**

# 37.5KVA 415 VOLTS TO 208 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------