


OFFICIAL QUOTE

750KVA 460 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



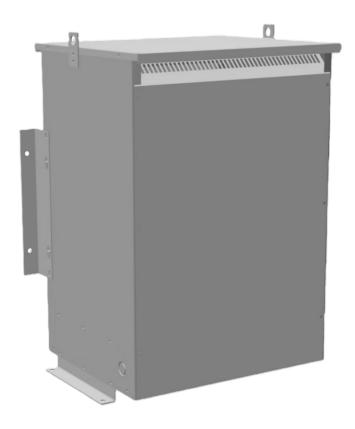

750KVA 460 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER

\$6,659.43 USD

Three Phase Autotransformer with a capacity of 750kVA, transforming 460Y Volts to 416Y Volts

SKU: RA750H1-G

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 750kVA, transforming 460Y Volts to 416Y Volts



OFFICIAL QUOTE



750KVA 460 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	458 lbs
Phases	<u>3</u>
kVA	<u>750</u>
Connection	3PhA-NT-1
Primary Voltage	460
Primary Max Current	941.3A
Primary Markings	H1-H2-H3
Primary Terminals	<u>Pads</u>
Secondary Voltage	416
Secondary Max Current	1040.9A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

750KVA 460 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------