


#### **OFFICIAL QUOTE**

## 10KVA 415 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



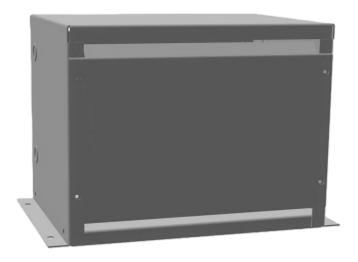

### 10KVA 415 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$1,182.50 CAD


Single Phase Autotransformer with a capacity of 10kVA, transforming 415 Volts to 277 Volts

SKU: MC10G2-D

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Autotransformer with a capacity of 10kVA, transforming 415 Volts to 277 Volts



### **OFFICIAL QUOTE**



# 10KVA 415 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 71.7 lbs   |
| Phases                     | 1  |
| kVA                        | 10   |
| Connection                 | 1PhA-NT-1  |
| Primary Voltage            | 415  |
| Primary Max Current        | 13.9A  |
| Primary Markings           | <u>H0-H1</u>   |
| Primary Terminals          | Terminal Blocks  |
| Secondary Voltage          | 277  |
| Secondary Max Current      | 20.8A  |
| Secondary Markings         | <u>X0-X1</u>   |
| Secondary Terminals        | <u>Terminal Blocks</u>   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.0 - 3.0%   |
| Sound (db)                 | 40 dB  |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-1</u>  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

# 10KVA 415 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|