


OFFICIAL QUOTE

750KVA 120 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



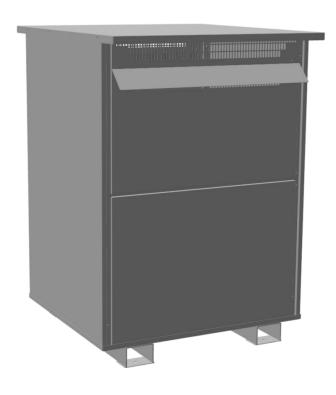

750KVA 120 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER


\$21,930.80 CAD


Three Phase Autotransformer with a capacity of 750kVA, transforming 120Y Volts to 208Y Volts

SKU: RA750A-B

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 750kVA, transforming 120Y Volts to 208Y Volts



OFFICIAL QUOTE

750KVA 120 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1944 lbs
Phases	<u>3</u>
kVA	750
Connection	3PhA-NT-1
Primary Voltage	120
Primary Max Current	<u>3608.4A</u>
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	208
Secondary Max Current	2081.8A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 - 3.5%</u>
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-10</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

750KVA 120 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------