


OFFICIAL QUOTE

112.5KVA 480 VOLTS TO 240Y/139 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



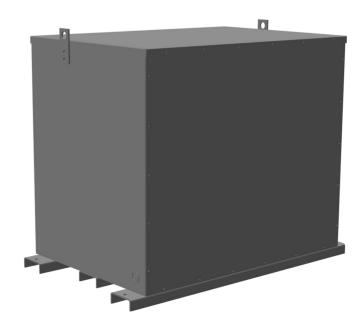

112.5KVA 480 VOLTS TO 240Y/139 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$18,668.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 112.5kVA, transforming 480 Volts to 240Y/139 Volts

SKU: BA112H-S/EP

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 112.5kVA, transforming 480 Volts to 240Y/139 Volts



OFFICIAL QUOTE



112.5KVA 480 VOLTS TO 240Y/139 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1365 lbs
Phases	3
kVA	112.5
Connection	3Ph-DY-5T-SD
Primary Voltage	480
Primary Max Current	<u>135.3A</u>
Primary Markings	H1-H2-3
Primary Terminals	300MCM-6
Secondary Voltage	240Y/139
Secondary Max Current	270.6A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	600MCM-2
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 - 3.5%</u>
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-8</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM