


OFFICIAL QUOTE

150KVA 550 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



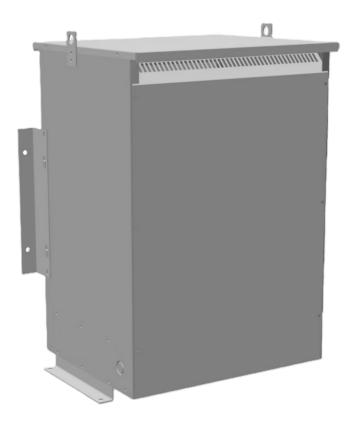

150KVA 550 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$8,546.80 CAD


Single Phase Autotransformer with a capacity of 150kVA, transforming 550 Volts to 277 Volts

SKU: MC150J2-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 150kVA, transforming 550 Volts to 277 Volts



OFFICIAL QUOTE



150KVA 550 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	599.9 lbs
Phases	1
kVA	<u>150</u>
Connection	1PhA-NT-1
Primary Voltage	<u>550</u>
Primary Max Current	<u>157.5A</u>
Primary Markings	<u>H0-H1</u>
Primary Terminals	300MCM-6
Secondary Voltage	277
Secondary Max Current	312.6A
Secondary Markings	<u>X0-X1</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 - 3.5%</u>
Sound (db)	<u>55 dB</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 550 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------