


OFFICIAL QUOTE

25KVA 230 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



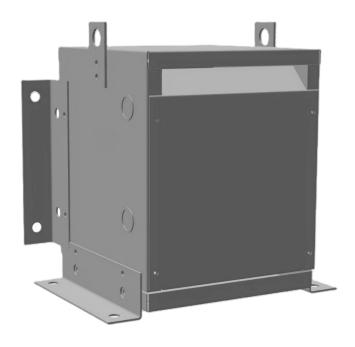

25KVA 230 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,332.10 CAD

Single Phase Autotransformer with a capacity of 25kVA, transforming 230 Volts to 277 Volts

SKU: MC25C1-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 25kVA, transforming 230 Volts to 277 Volts



OFFICIAL QUOTE



25KVA 230 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	80.5 lbs
Phases	1
kVA	<u>25</u>
Connection	<u>1PhA-NT-1</u>
Primary Voltage	230
Primary Max Current	62.8A
Primary Markings	<u>X0-X1</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	277
Secondary Max Current	<u>52.1A</u>
Secondary Markings	<u>H0-H1</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-2</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

25KVA 230 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------