


OFFICIAL QUOTE

500KVA 460 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



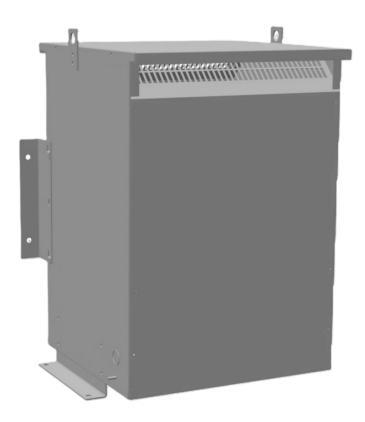

500KVA 460 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER

\$6,219.90 CAD

Three Phase Autotransformer with a capacity of 500kVA, transforming 460Y Volts to 415Y Volts

SKU: RA500H1-G2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 500kVA, transforming 460Y Volts to 415Y Volts



OFFICIAL QUOTE





PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	295 lbs
Phases	<u>3</u>
kVA	500
Connection	3PhA-NT-1
Primary Voltage	460
Primary Max Current	627.6A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	415
Secondary Max Current	695.6A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

500KVA 460 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------