


OFFICIAL QUOTE

750KVA 277 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER



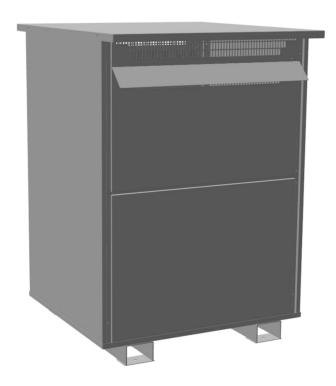

750KVA 277 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER

\$38,056.10 CAD


Three Phase Autotransformer with a capacity of 750kVA, transforming 277Y Volts to 550Y Volts

SKU: RC750D-J2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 750kVA, transforming 277Y Volts to 550Y Volts



OFFICIAL QUOTE



750KVA 277 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	3116 lbs
Phases	<u>3</u>
kVA	<u>750</u>
Connection	3PhA-NT-1
Primary Voltage	277
Primary Max Current	1563.2A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	<u>550</u>
Secondary Max Current	787.3A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-10
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

750KVA 277 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------