


OFFICIAL QUOTE

100KVA 416 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER



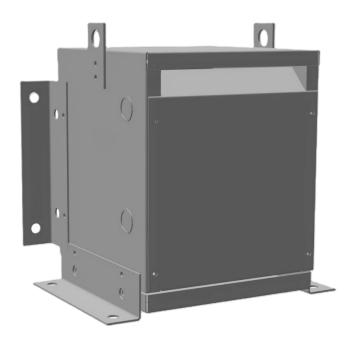

100KVA 416 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$1,511.60 CAD


Single Phase Autotransformer with a capacity of 100kVA, transforming 416 Volts to 440 Volts

SKU: MC100G-H2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 100kVA, transforming 416 Volts to 440 Volts



OFFICIAL QUOTE





PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	100.4 lbs
Phases	1
kVA	100
Connection	<u>1PhA-NT-1</u>
Primary Voltage	416
Primary Max Current	138.8A
Primary Markings	<u>X0-X1</u>
Primary Terminals	300MCM-6
Secondary Voltage	440
Secondary Max Current	131.2A
Secondary Markings	<u>H0-H1</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-2</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

100KVA 416 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------