


#### **OFFICIAL QUOTE**

### 75KVA 240 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



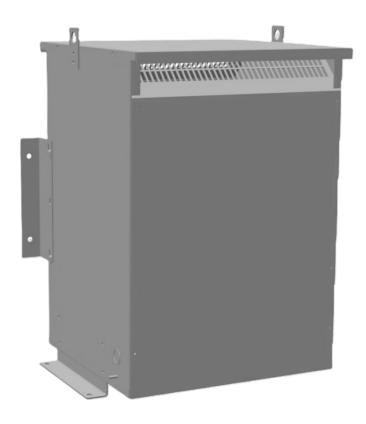

### 75KVA 240 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,659.30 CAD


Three Phase Autotransformer with a capacity of 75kVA, transforming 240Y Volts to 347Y Volts

SKU: RC75C-E

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 75kVA, transforming 240Y Volts to 347Y Volts



#### **OFFICIAL QUOTE**



## 75KVA 240 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 200 lbs  |
| Phases                     | <u>3</u>   |
| kVA                        | <u>75</u>  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 240  |
| Primary Max Current        | 180.4A   |
| Primary Markings           | <u>X1-X2-X3</u>  |
| Primary Terminals          | 300MCM-6   |
| Secondary Voltage          | 347  |
| Secondary Max Current      | <u>124.8A</u>  |
| Secondary Markings         | <u>H1-H2-H3</u>  |
| Secondary Terminals        | 300MCM-6   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.0 - 3.0%   |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-6</u>   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

# 75KVA 240 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|