


#### **OFFICIAL QUOTE**

## 15KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



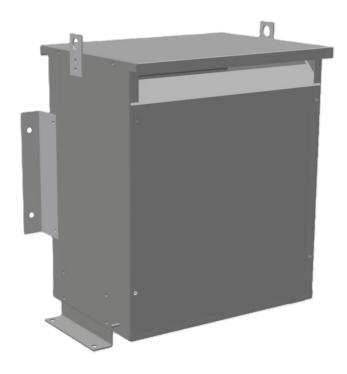

### 15KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,466.50 CAD


Three Phase Autotransformer with a capacity of 15kVA, transforming 400Y Volts to 110Y Volts

**SKU:** RC15G1-A2

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 15kVA, transforming 400Y Volts to 110Y Volts



### **OFFICIAL QUOTE**



# 15KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |   |
|----------------------------|---|
| Weight                     | 84 lbs  |
| Phases                     | <u>3</u>  |
| kVA                        | <u>15</u>   |
| Connection                 | 3PhA-NT-1   |
| Primary Voltage            | 400   |
| Primary Max Current        | 21.7A   |
| Primary Markings           | H1-H2-H3  |
| Primary Terminals          | Terminal Blocks   |
| Secondary Voltage          | 110   |
| Secondary Max Current      | 78.7A   |
| Secondary Markings         | <u>X1-X2-X3</u>   |
| Secondary Terminals        | #2/0-6 AWG  |
| Primary Taps               | N/A   |
| Conductor Material         | Copper  |
| Insulation Class           | 220°C (Class H)   |
| BIL (Insulation) Level     | <u>10kV</u>   |
| Efficiency (@35% Load) %   | N/A   |
| Impedance Range            | 2.5 - 4.5%  |
| Sound (db)                 | 45  |
| Enclosure Type             | NEMA 3R Indoor  |
| Enclosure Size             | <u>E3R-5</u>  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015  Registered |



### **OFFICIAL QUOTE**

# 15KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|