


OFFICIAL QUOTE

BC75Q-M/Z3



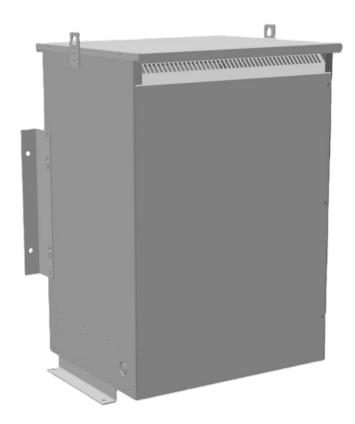


BC75Q-M/Z3


\$5,982.35 USD

SKU: 90bffabe64dd

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

Weight	670 lbs
Phases	3
kVA	<u>75</u>
Connection	<u>3Ph-YY-5T-SD</u>
Primary Voltage	600Y/347



OFFICIAL QUOTE

BC75Q-M/Z3



Primary Max Current	72.2A
Primary Markings	<u>H0-H1-H2-H3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	<u>208Y/120</u>
Secondary Max Current	<u>208.2A</u>
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	600MCM-2
Primary Taps	<u>+/- 2 x 2.5%</u>
Conductor Material	<u>Copper</u>
Insuation Class	220°C
BIL (Insulation) Level	<u>10kV</u>
Impedance	4.0 - 6.0%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure	<u>E3R-7</u>
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	98.74%