




## BC3J-M

**\$1,648.00 CAD**

SKU: 6d5e7af9ccf6

Categories: [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

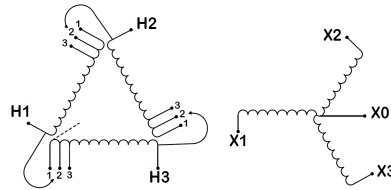

### PRODUCT SPECIFICATIONS

|                            |                                 |
|----------------------------|---------------------------------|
| <b>Weight</b>              | 80 lbs                          |
| <b>Phases</b>              | <a href="#">3</a>               |
| <b>kVA</b>                 | <a href="#">3</a>               |
| <b>Connection</b>          | <a href="#">3Ph-DY-3T-SD</a>    |
| <b>Primary Voltage</b>     | <a href="#">600</a>             |
| <b>Primary Max Current</b> | <a href="#">2.9A</a>            |
| <b>Primary Markings</b>    | <a href="#">H1-H2-H3</a>        |
| <b>Primary Terminals</b>   | <a href="#">Terminal Blocks</a> |



|                                       |  |
|---------------------------------------|--|
| <b>Secondary Voltage</b>              | <a href="#">208Y/120</a>   |
| <b>Secondary Max Current</b>          | <a href="#">8.3A</a>   |
| <b>Secondary Markings</b>             | <a href="#">X0-X1-X2-X3</a>  |
| <b>Secondary Terminals</b>            | <a href="#">Terminal Blocks</a>  |
| <b>Primary Taps</b>                   | <a href="#">+/- 1 x 5%</a>   |
| <b>Conductor Material</b>             | <a href="#">Copper</a>   |
| <b>Insulation Class</b>               | <a href="#">180°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Impedance</b>                      | <a href="#">5.5 – 7.0%</a>   |
| <b>Sound (db)</b>                     | <a href="#">40</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 1</a>   |
| <b>Enclosure</b>                      | <a href="#">E1-3</a>   |
| <b>Finish</b>                         | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |